

Panasonic

Integrated Telephone System

Operating Instructions

Model No. **KX-TS500HG**

Pulse-or-tone dialing capability



KX-TS500HG

PLEASE READ BEFORE USE AND SAVE.

For your future reference

Serial No. _____
(found on the bottom of the unit)

Date of purchase _____

Name and address of dealer _____



1999/5/EC

This equipment is designed for use on Hungary only.


In the event of problems, you should contact your equipment supplier in the first instance.

Manufactured by Panasonic
Communications (Malaysia) Sdn. Bhd.
Senai Malaysia

PQX13969ZA F1003-0 ©

1 Getting Started

1-A Location of controls

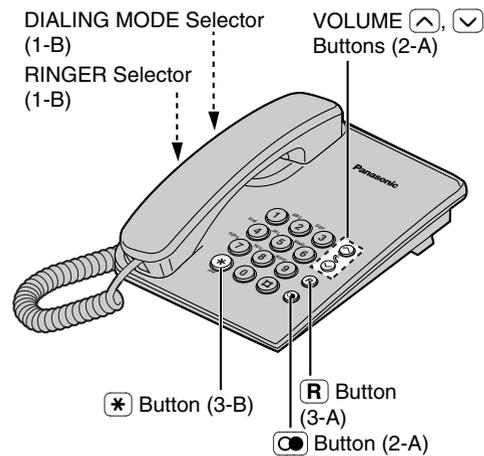


Accessories (included)

- Handset one
- Handset Cord one
- Telephone Line Cord one

1-B Settings

- 1 Connect the telephone line cord (①).
- 2 Connect the handset cord (②), then confirm the dial tone.

To Single-Line Telephone Jack

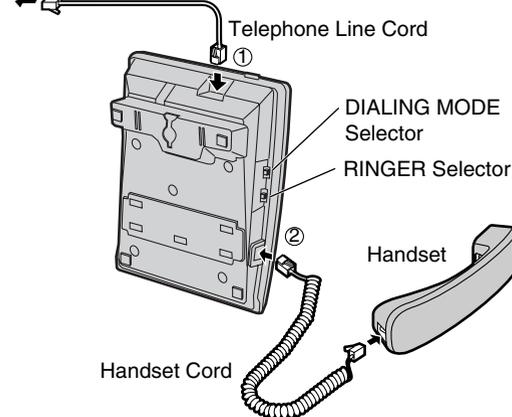

3 Special Features

3-A Recall Button

Pressing **R** allows you to use special features of your host PBX such as transferring an extension call or accessing special telephone services (optional) such as call waiting.

3-B Temporary Tone Dialing (For Rotary or Pulse Service Users)

Press ***** before entering access numbers which require tone dialing.

- The dialing mode changes to tone. You can enter numbers to access answering services, electronic banking services, etc. When you hang up, the mode will return to pulse.
- Access numbers entered after pressing ***** will not be included when redialing.

2 Operation

2-A Making Calls

- 1 Lift the handset.
- 2 Dial a phone number.
 - If you misdial, hang up and start again from step 1.
- 3 When finished talking, hang up.

To redial the last number dialed
Lift the handset. → Press **☎**.

To adjust the receiver volume (6 levels) while talking
To increase, press **▲**.
To decrease, press **▼**.
• After hanging up, the volume level will be saved.

2-B Answering Calls


- 1 When the unit rings, lift the handset.
- 2 When finished talking, hang up.

4 Things You Should Know → Things You Should Know

4-A Wall Mounting


The unit can be mounted on a wall.

- 1 Press the tabs in the direction of the arrows (①), then remove the wall mounting adaptor (②).




- 2 Tuck the telephone line cord inside the wall mounting adaptor, and push it in the direction of the arrow (① and ②).


- The word "UP WALL" should face upward.



- 3 Install screws using the wall template below. Connect the telephone line cord. Mount the unit, then slide down.
 - Fasten the cord to prevent it from being disconnected.

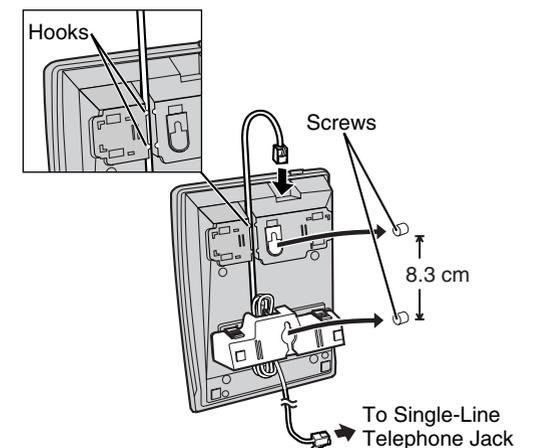

► Things You Should Know



To temporarily set the handset down during a conversation, place it as shown here.

4-B Troubleshooting

Problem	Remedy
The unit does not work.	● Check the settings (1-B).
The call cannot be connected even if you dialed correctly.	● Check whether the DIALING MODE selector setting is correct or not (1-B).
The unit does not ring.	● The RINGER selector is set to OFF. Set to HIGH or LOW (1-B).

4-C Safety Instructions

Take special care to follow the safety suggestions listed below.

Installations Environment

- 1) Do not use this unit near water—for example, near a bathtub, washbowl, sink, etc. Damp basements should also be avoided.
- 2) The unit should be kept away from heat sources such as radiators, kitchen range, etc. It also should not be placed in rooms where the temperature is less than 5°C or greater than 40°C.

Placement

- 1) Do not place heavy objects on top of this unit.
- 2) Care should be taken so that objects do not fall onto, and liquids are not spilled into the unit. Do not subject this unit to excessive smoke, dust, mechanical vibration or shock.
- 3) Place the unit on a flat surface.

4-D Specifications

Power Source:	From telephone line
Dimensions (H x W x D):	Approx. 96 mm x 150 mm x 200 mm
Mass (Weight):	Approx. 475 g
Dialing Mode:	Tone (DTMF)/Pulse
Operating Environment:	5 °C – 40 °C

Specifications are subject to change without notice.

Lightning surge

This unit has already been equipped with a built-in lightning protection circuit. However, we recommend that you install lightning protection on the telephone line, if your area has a high incidence of lightning strikes.


To install the above option, please contact your local sales shop.

- Lightning damage is not covered in the warranty even if lightning protection is installed.

WARNING:

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR ANY TYPE OF MOISTURE.

If trouble occurs, disconnect the unit from the telephone line and connect to a known working phone. If the known working phone operates properly, do not reconnect the unit until the trouble has been repaired. If the known working phone does not operate properly, consult your telephone company.

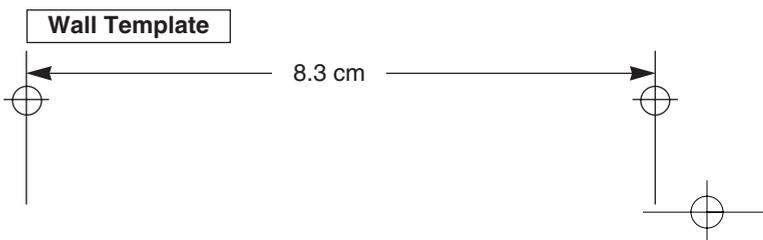

Panasonic Magyarország

KERESKEDELMI ÉS SZOLGÁLTATÓ KFT

D03-PMK-HU032-1

MEGFELELŐSÉGI NYILATKOZAT

A Panasonic Magyarország Kft.
.....
1117 Budapest, Neumann J. u. 1.

mint a gyártó magyarországi képviselője és a termékek importálója, valamint a műszaki dokumentáció tárolója saját felelősségünkre kijelentjük, hogy a CE jelöléssel ellátott alábbi termék

..... Telefon készülék
.....
típus: KX-TS500HG
.....
márka: Panasonic
.....

megfelel a rádióberendezésekről és a távközlő végberendezésekről, valamint megfelelőségük elismeréséről szóló 3/2001 (I. 31.) MeHVM rendelet 3.§ -ában foglalt alapvető követelményeknek, valamint az alábbi távközlési (rádiótávközlési), villamos biztonságtechnikai és elektromágneses összeférhetőségi követelményeket tartalmazó szabványoknak, illetőleg egyéb normatív dokumentumoknak:

..... MSZ ETS 300 001:1994, ME-17-051-1:1993
.....
..... MSZ EN 60950:2001
.....
..... MSZ EN 55022:2000+A1:2001, MSZ EN 55024:2000+A1:2002
.....

Dátum: Budapest, 2003.09.22.

Aláírás: 

Név: Stark István

Beosztás: Vezérigazgató



A gyártói Megfelelőségi Nyilatkozat száma: D03-PCTP-D107-1-01